

A Series Non-Corrosive Centrifugal Pumps

PAGE: CP-1100
DATE: June 5, 2006




FPS

A series

Flooded suction centrifugal pump suitable for use with saltwater, chemical transfer, and other pumping applications that deal with corrosive substances.

Features:

- High tech, non-corrosive plastic construction. All metal components that have contact with liquid are stainless steel.
- Motor shaft is completely insulated from any contact with pumping liquid.
- 2" union connections ensure easy service and optimum water flow. Unions must be ordered separately.
- Discharge port easily rotates to 90 degree increments without removing motor.
- Lightweight design.

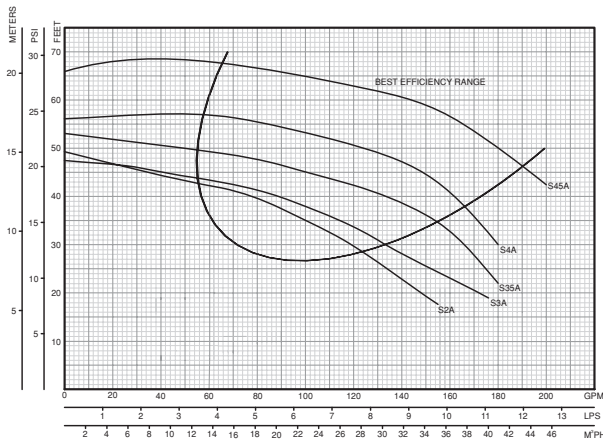

Ordering Information

"A" SERIES THERMOPLASTIC CENTRIFUGAL PUMPS						
Series	Suction x Discharge	Model	HP	Voltage	Pump Unit	
					Order No.	Wt.
A	2" x 2" MNPT	S2A	2	115/230	94216151	27
		S3A	3	230	94216191	29
		S35A	3-1/2	230	94216201	31
		S4A	4	230	94216301	35
		S45A	4-1/2	230	94216401	39
Fittings kit contains (2) 2" slip x threaded connection union halves					31150109	2

Note: Set of union halves must be purchased separately.



Franklin Electric
400 East Spring Street, Bluffton, IN 46714
Tel: 260.824.2900 Fax: 260.824.2909
www.franklinpumps.com

S Series Non-Corrosive Centrifugal Pumps

PAGE: CP-1105
DATE: June 5, 2006




FPS

S Series

This flooded suction centrifugal pump is suitable for use with saltwater, chemical transfer (please consult factory for specific chemical compatibility), and other pumping applications that deal with corrosive substances.

Features:

- High tech, non-corrosive plastic construction. All metal components that have contact with liquid are stainless steel.
- Motor shaft is completely insulated from any contact with pumping liquid.
- Mechanical seal has ceramic and carbon faces. All other parts are buna-n-rubber and stainless steel.
- Patented air cooled heat sink allows pump to run dry or in loss-of-prime conditions without damage to the shaft seal. Unconditional two year warranty against seal failure.
- Floating eye seal on the impeller maximizes pump efficiency for best flow and pressure.
- Will accept either a standard 1-1/2" union or a male 1-1/2" pipe thread. Unions must be ordered separately.
- UL and CSA agency listing do not apply to any application other than water applications.

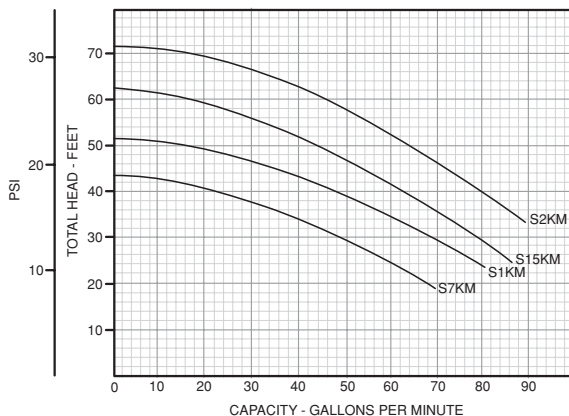

Ordering Information

"S" SERIES THERMOPLASTIC CENTRIFUGAL PUMPS						
Series	Suction x Discharge	Model	HP	Voltage	Pump Unit	
					Order No.	Wt.
S	1-1/2" x 1-1/2" MNPT	S7KM	3/4	115	94028263	22
		S1KM	1	115	94028271	24
		S15KM	1-1/2	115	94028289	26
		S2M	2	115/230	94028297	35
Fittings kit contains (2) 1-1/2" slip x threaded connection union halves					31175608	1

Note: Set of union halves must be purchased separately.



Franklin Electric

400 East Spring Street, Bluffton, IN 46714
Tel: 260.824.2900 Fax: 260.824.2909
www.franklinpumps.com

JCM Series

Self-Draining Non-Corrosive Centrifugal Pumps


PAGE: CP-1110

DATE: June 5, 2006



Features:

- 100% self-draining case satisfies both UL and IAPMO standards.
- Air-cooled heat sink allows pump to run dry without damage to the shaft seal.
- Floating eye seal between the closed impeller and the pump case maximizes pump efficiency for best flow and pressure.
- Accepts a 1-1/2" standard union. Union adapter kits must be ordered separately.
- UL and CSA Agency listings do not apply to any application other than water applications.

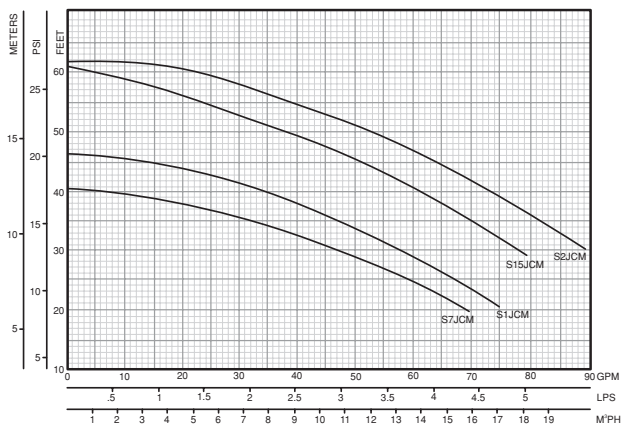

Dimensions (In Inches)

HP	A
3/4	16-5/8"
1	16-5/8"
1-1/2	17-1/16"
2	17-1/16"

