

Direct Drive Waterfall Pumps

These direct drive waterfall pumps are robustly constructed with non-corrosive components, carbon/ceramic mechanical seals and brass inserts at the discharge. To be used only for submersible applications, these water-cooled pumps do not use oil. By design, they ensure safe and efficient operation in high flow waterfalls, large biological filters, ponds, water gardens and streams. They are cULus listed, come with a 20' power cord and can be installed inline after removing the bottom screen.

One Year Warranty



PW1200

1" MNPT Discharge
20' Power Cord
3/4" Garden Hose Adapter Included
Efficient PSC Motor



PW4500

1-1/4" MNPT Discharge
1-1/4" -2" Elbow Adapter Included
20' Power Cord
Efficient PSC Motor



PW5500

1-1/4" MNPT Discharge
1-1/4" -2" Elbow Adapter Included
20' Power Cord
Efficient PSC Motor

Shown with 1-1/4" up to 2" elbow

Shown with optional TS1.5 filter (Sold separately)




PW2500

1-1/4" MNPT Discharge
1-1/4" -2" Elbow Adapter Included
20' Power Cord
Efficient PSC Motor



PW3500

1-1/4" MNPT Discharge
1-1/4" -2" Elbow Adapter Included
20' Power Cord
Efficient PSC Motor

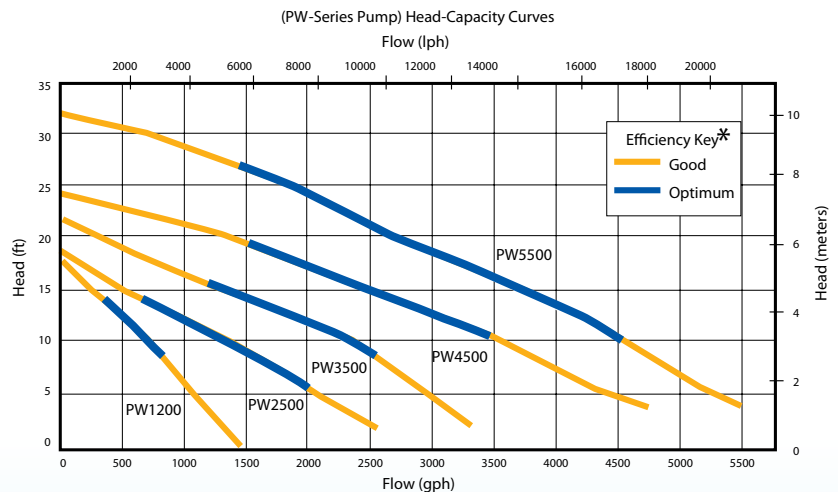

* Efficiency key illustrates where pump is most energy efficient.

Model	Amps	Watts	Max Flow	Max Ht.	1'	5'	10'	15'	20'	25'	30'
PW1200	1.5	160	1420	19'	1420	1175	790	182	-	-	-
PW2500	3	265	2650	18'	2650	2102	1325	450	-	-	-
PW3500	4.2	330	3400	21'	3400	3000	2390	1400	-	-	-
PW4500	6.6	465	4900	24'	4900	4350	3475	2530	1385	-	-
PW5500	8.7	735	5600	32'	5600	5250	4500	3700	2700	1850	660