


Pumps


Little Giant has developed the broadest and most reliable line of pumps on the market since 1941.

Pumps are the heart of any water feature, because circulation is the key to a healthy aquatic environment. To facilitate that circulation, Little Giant pumps are available in a complete range of flow rates. Each features rugged construction and exceptional engineering to install easily and last for years.

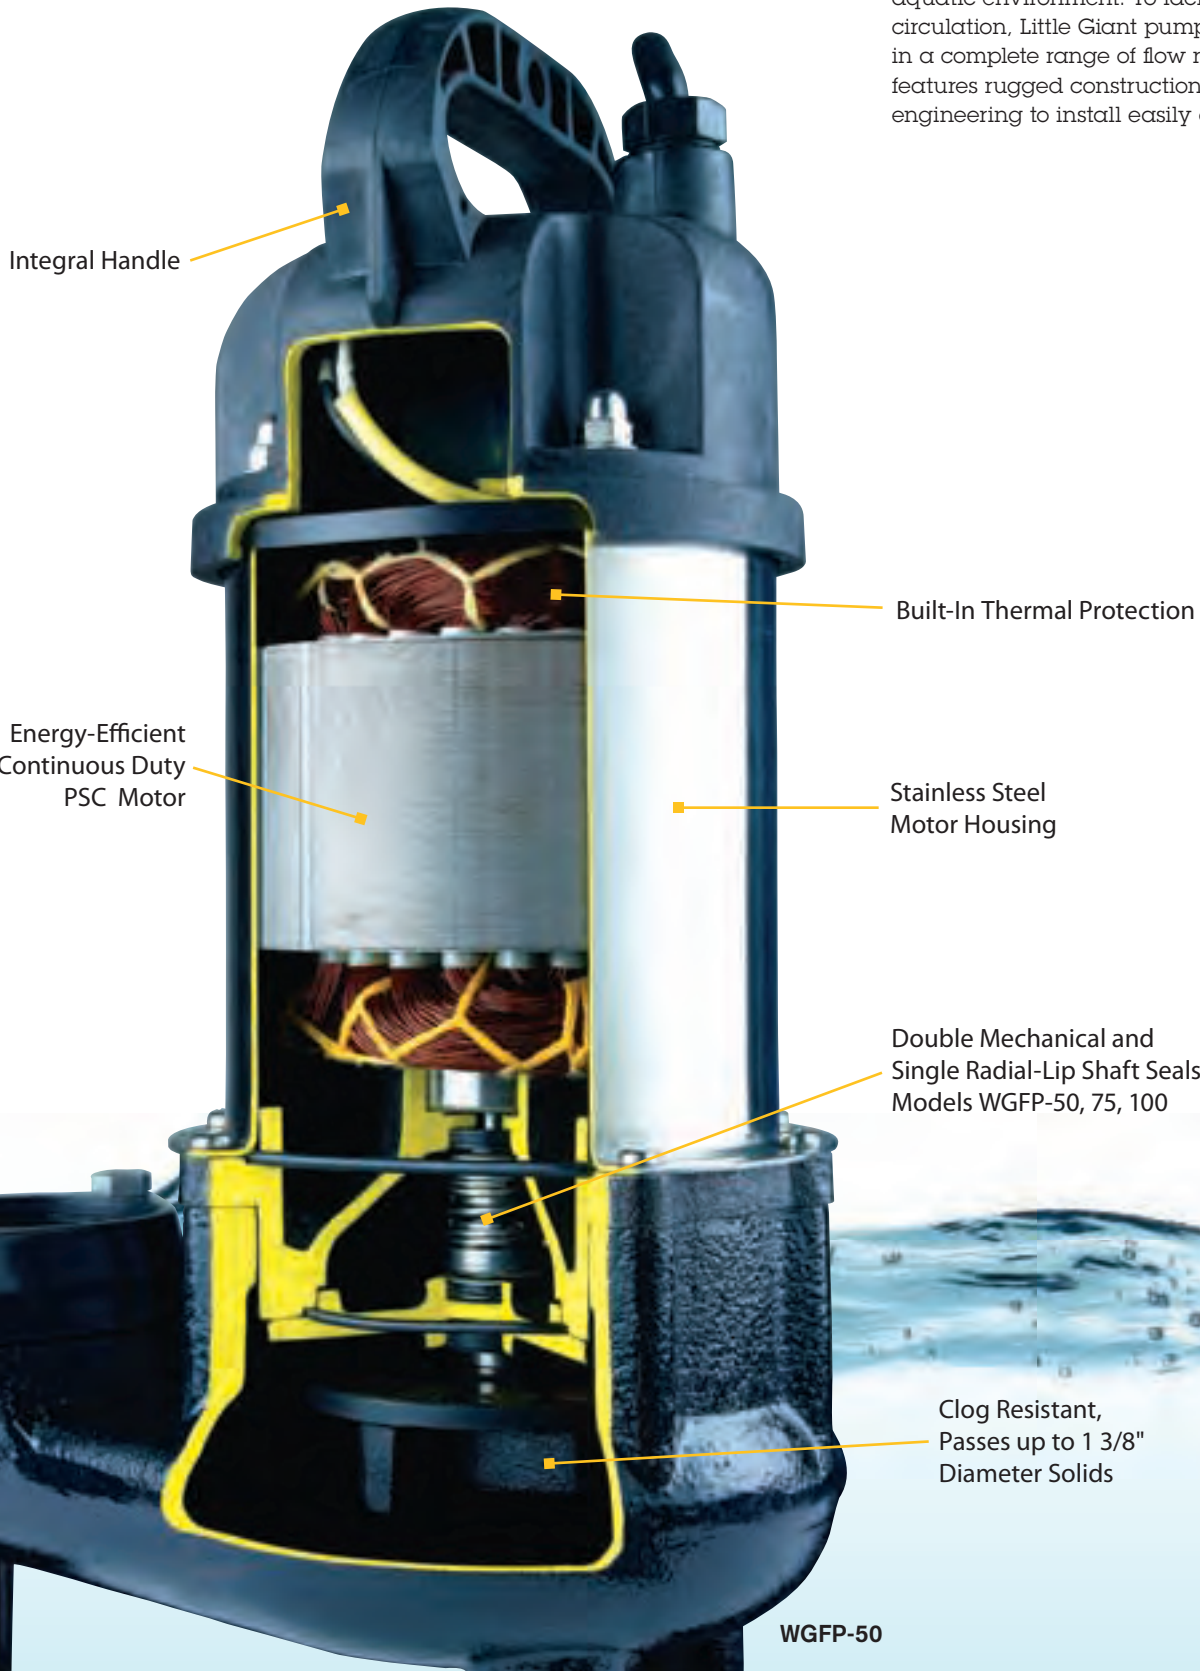

NEW Submersible Water Feature Pumps

Constructed with stainless steel, cast iron and durable thermoplastic, the new solids-handling submersible water feature pumps from Little Giant meet the rigorous demands of the most impressive water features and come with a two-year limited warranty.

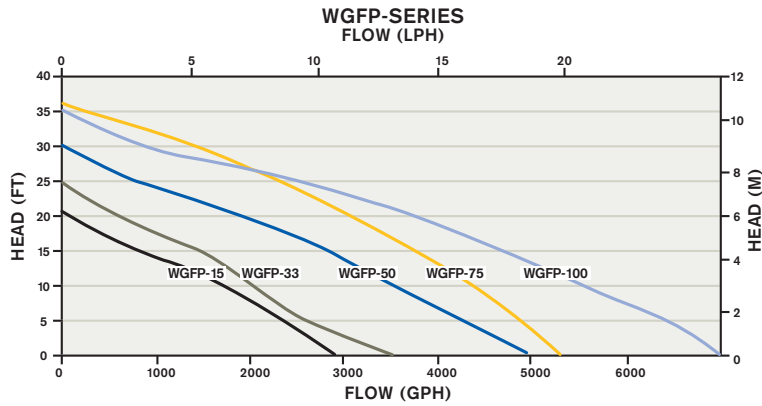

2300 GPH, 1/5 HP Solids-Handling

ITEM 566066 MODEL WGFP-15

- 21' Maximum Pumping Height
- 3/8" Solids-Handling Ability
- 1-1/4" NPT Vertical Discharge
- 355 Watts
- Single Mechanical and Single Radial-Lip Shaft Seals
- cCSAus Certified
- 19' Power Cord

4280 GPH, 1/2 HP Solids-Handling

ITEM 566068 MODEL WGFP-50

- 30' Maximum Pumping Height
- 1-3/16" Solids-Handling Ability
- 2" NPT Vertical Discharge
- 590 Watts
- Double Mechanical and Single Radial-Lip Shaft Seals
- cCSAus Certified
- 19' Power Cord

2500 GPH, 1/3 HP Solids-Handling

ITEM 566067 MODEL WGFP-33

- 25' Maximum Pumping Height
- 1" Solids-Handling Ability
- 1-1/2" NPT Vertical Discharge
- 455 Watts
- Single Mechanical and Single Radial-Lip Shaft Seals
- cCSAus Certified
- 19' Power Cord

4900 GPH, 3/4 HP Solids-Handling

ITEM 566069 MODEL WGFP-75

- 36' Maximum Pumping Height
- 1-3/8" Solids-Handling Ability
- 2" NPT Vertical Discharge
- 847 Watts
- Double Mechanical and Single Radial-Lip Shaft Seals
- cCSAus Certified
- 19' Power Cord



6400 GPH, 1 HP Solids-Handling

ITEM 566070 MODEL WGFP-100

- 35' Maximum Pumping Height
- 1-3/8" Solids-Handling Ability
- 2" NPT Vertical Discharge
- 1,210 Watts
- Double Mechanical and Single Radial-Lip Shaft Seals
- 19' Power Cord



K-Series Solids-Handling Pumps

Little Giant's K-Series pumps are built for professional installations. Engineered for non-potable submersible use, and designed to handle solids, these pumps feature efficient oil-less motors protected by a stainless steel cylinder. All K-Series pumps are cCSAus certified, 115 Volt operation and have 16' power cords.



5250 GPH, 1 HP Solids-Handling
ITEM 14940127 MODEL K5000

- 32' Maximum Pumping Height
- 1-1/4" Solids-Handling Ability
- 1-1/2" FNPT Horizontal Discharge
- 1,000 Watts
- Includes: 1-1/2" FNPT x 1-1/2" MNPT Elbow



1250 GPH, 1/10 HP SOLIDS-HANDLING

2700 GPH, 1/2 HP Solids-Handling
ITEM 14940125 MODEL K3000

- 27' Maximum Pumping Height
- 3/4" Solids-Handling Ability
- 1-1/4" FNPT Horizontal Discharge
- 600 Watts
- Includes: 1-1/2" FNPT x 1-1/4" MNPT Elbow

3900 GPH, 1/3 HP Solids-Handling
ITEM 14940126 MODEL K4000

- 29' Maximum Pumping Height
- 3/4" Solids-Handling Ability
- 1-1/4" FNPT Horizontal Discharge
- 680 Watts
- Includes: 1-1/2" FNPT x 1-1/4" MNPT Elbow

1950 GPH, 1/4 HP Solids-Handling
ITEM 14940124 MODEL K2000

- 15' Maximum Pumping Height
- 3/4" Solids-Handling Ability
- 1-1/4" FNPT Horizontal Discharge
- 350 Watts
- Includes: 1-1/2" FNPT x 1-1/4" MNPT Elbow

1250 GPH, 1/10 HP Solids-Handling
ITEM 14940123 MODEL K1000

- 14' Maximum Pumping Height
- 3/4" Solids-Handling Ability
- 1-1/4" FNPT Horizontal Discharge
- 240 Watts
- Includes: 1-1/2" FNPT x 1-1/4" MNPT Elbow

