


Model DB3 Performance 3" Discharge x 4" Suction (3500 RPM)

PAGE: CP-421
DATE: June 5, 2006

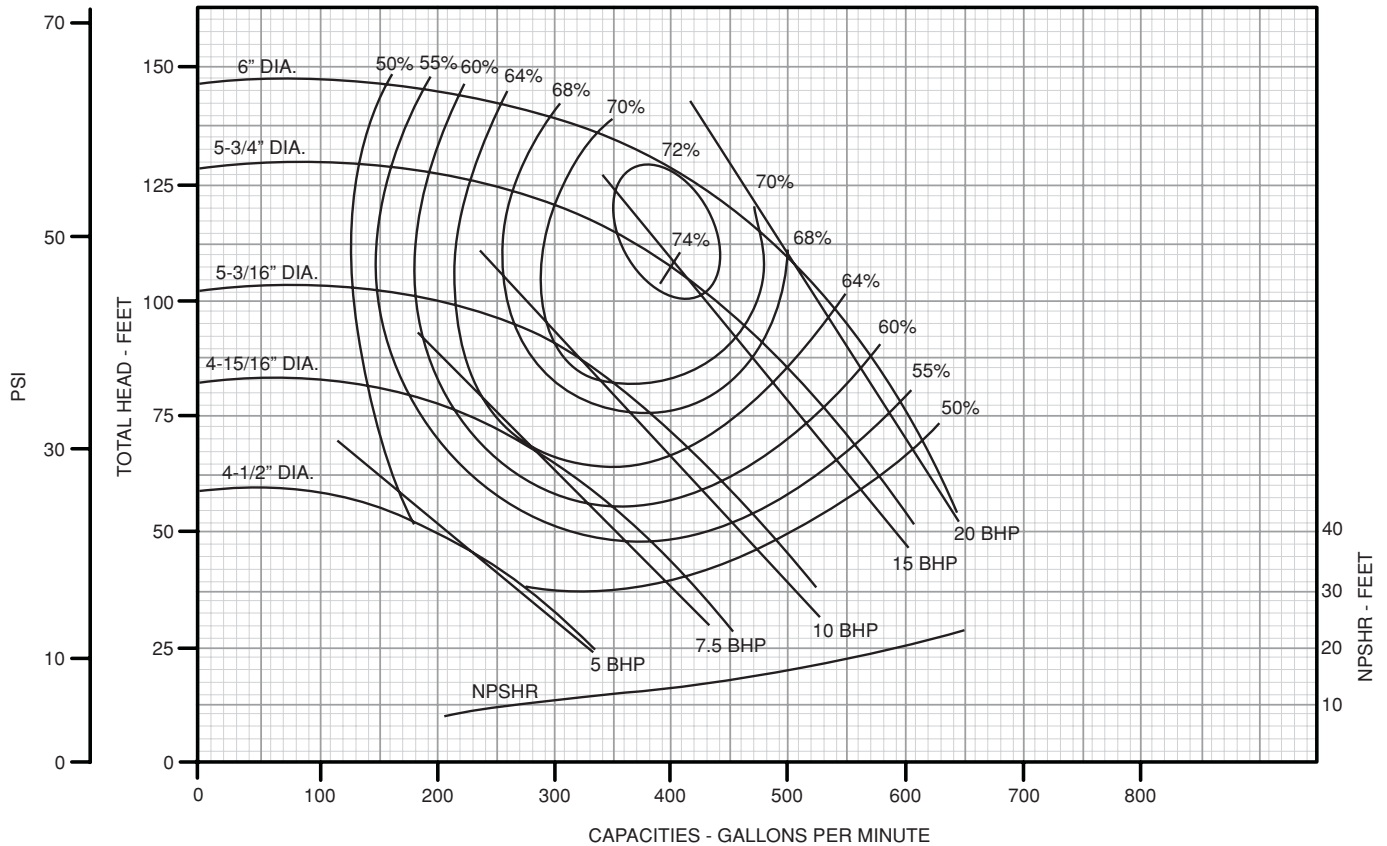

| DB3 4" Suction x 3" Discharge | | | Capacities GPM | | | | | | | | | | | | | | Shut-off Head (Ft.) | | |
|----------------------------------|-------|-----------|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---------------------------|-----|-----|
| Model | HP | Imp. Dia. | Total Head in Feet | | | | | | | | | | | | | | | | |
| | | | 25 | 30 | 35 | 40 | 45 | 50 | 60 | 70 | 80 | 90 | 100 | 110 | 120 | 130 | 140 | 150 | |
| 5DB3 | 5 | 4-1/2" | 335 | 305 | 280 | 250 | 220 | 200 | | | | | | | | | | | 60 |
| 75DB3 | 7-1/2 | 4-15/16" | | 440 | 425 | 405 | 385 | 365 | 320 | 260 | | | | | | | | | 81 |
| 10DB3 | 10 | 5-5/16" | | | | 505 | 490 | 470 | 440 | 400 | 360 | 250 | | | | | | | 101 |
| 15DB3 | 15 | 5-3/4" | | | | | | 600 | 580 | 550 | 510 | 460 | 430 | 380 | 300 | | | | 128 |
| 20DB3 | 20 | 6" | | | | | | | 630 | 610 | 590 | 550 | 530 | 510 | 450 | 380 | | | 146 |

Note: All performance data based on rated nameplate voltage.